



TYPE A

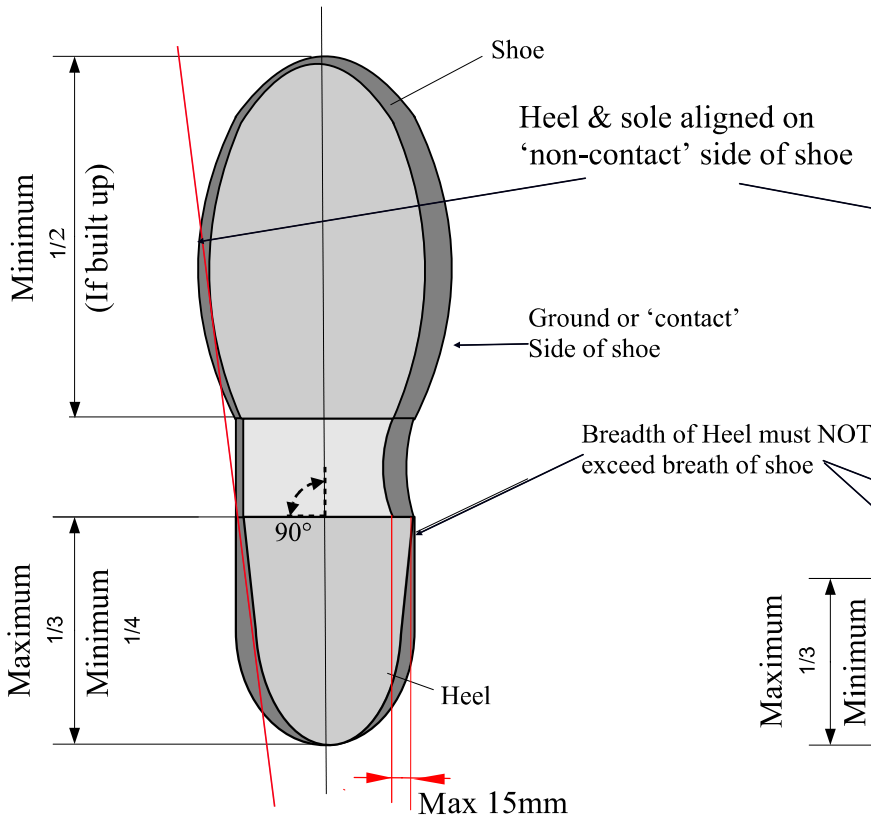


View of bottom of the shoe with 'cut-out' instep

TYPE B

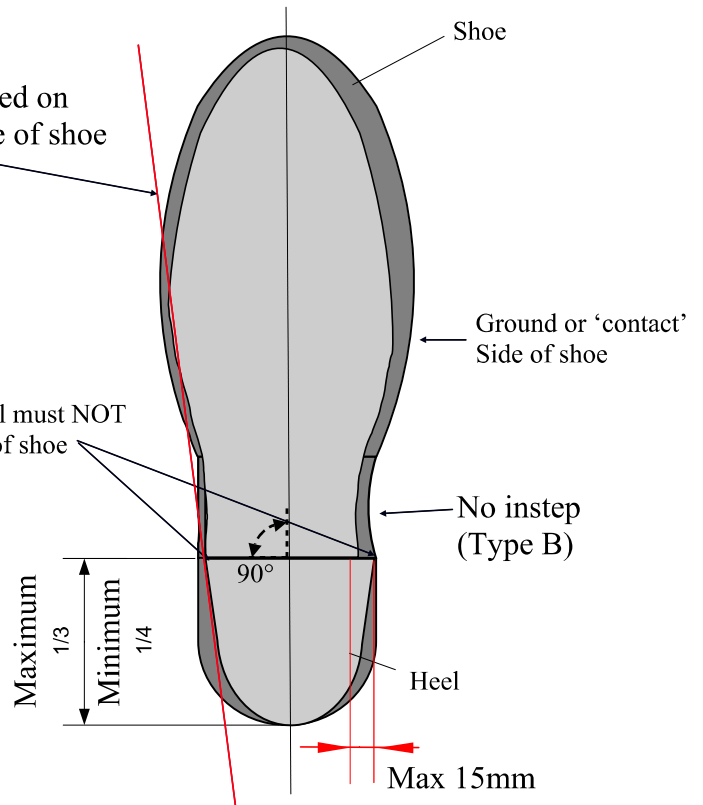


View of bottom of the shoe without 'cut-out' instep

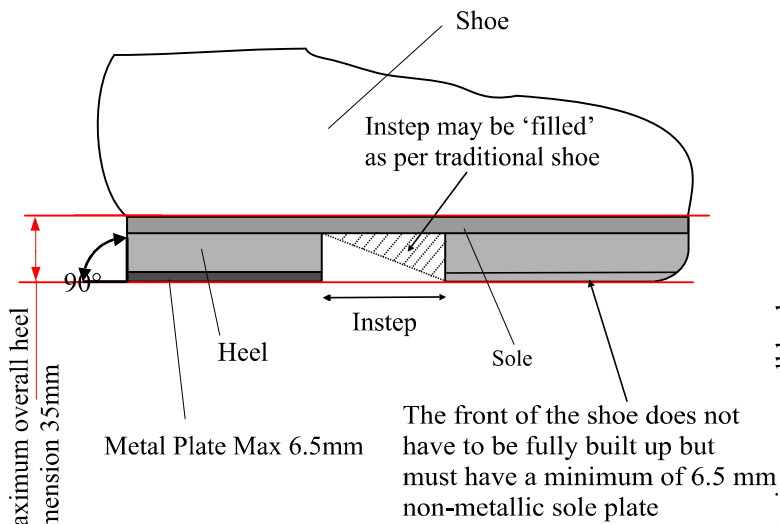

View of side of the shoe with 'cut-out' instep (Type A)


The front of the shoe does not have to be fully built up but must have a minimum of 6.5 mm non-metallic sole plate

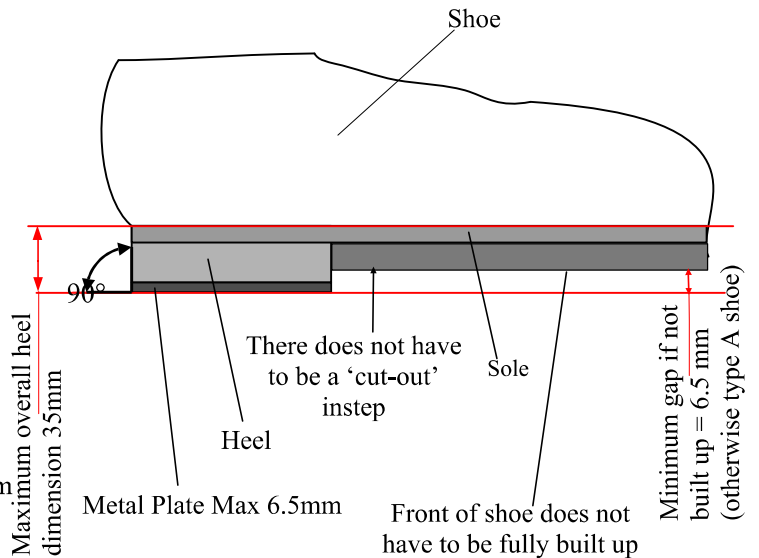

View of side of the shoe without 'cut-out' instep (Type B)

Front of shoe does not have to be fully built up but must have a minimum of 6.5 mm non-metallic sole plate

Breadth of Heel must NOT exceed breath of shoe

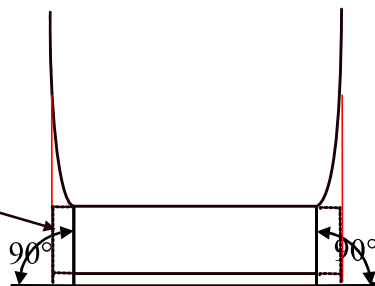

View of heel from the rear of the shoe (Type A and B)

Minimum gap if not built up = 6.5 mm (otherwise type A shoe)